

4100R Standard Pump (214RW)

4100 Series (90°) Series Pump Features:


- 4100 series 90° T&E cast housing with 5" inlet & outlet.
- 5" steel weld flanges.
- 7.25" helical cut, nitrided steel gears.
- Requires a minimum 4" hose & fitting.

Part Number:

- 214RW 5" T&E 90° cast housing/steel gears/combo caps.


Horsepower Requirements:

- Hydraulic Motor 50-60 hp.
 - 112 Series Recommended.
- Electric Motor 20 hp with 440VFD.

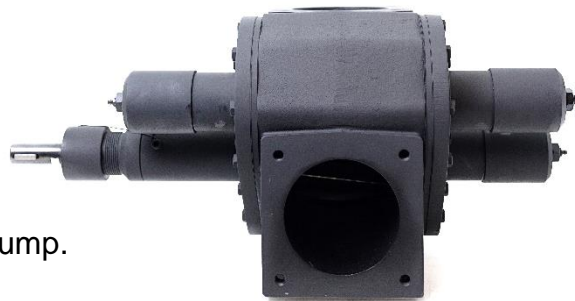

Recommended Operating Procedures:

- Maximum Temp: 212°F.
- Maximum RPM: 850 RPM at the pump.
- Maximum Pressure: 125 PSI.
 - *Note: Pump pressure is maximum safe operating pressure, not the maximum pressure the pump will produce.*

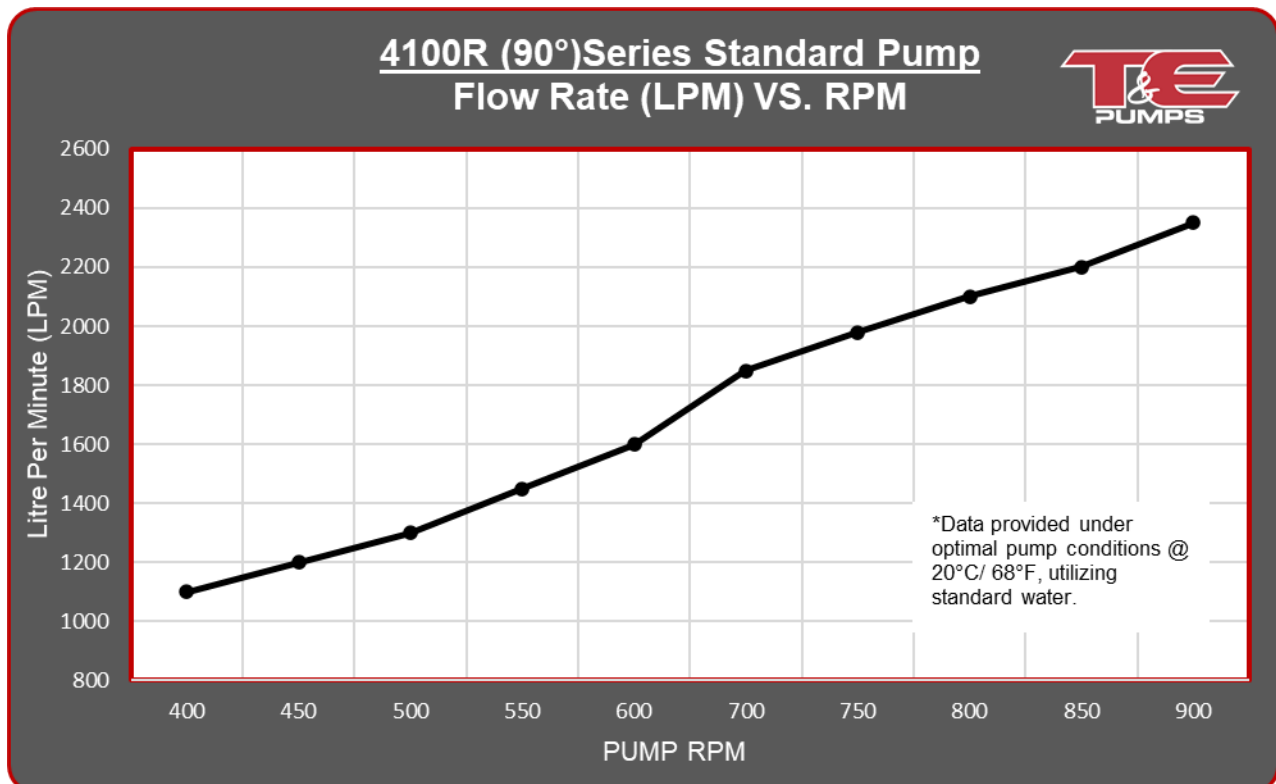

Installation Dimensions:

