

## 2100 Direct Drive Pump (513WD)

### 2100 (180°) Direct Drive Pump Features:

- 2100 series straight through T&E cast housing with 2" inlet & outlet.
- Available with optional nitrided housing, Teflon seals.
- 2" threaded flanges.
- 4" helical cut, nitrided steel gears.
- Requires a minimum 2" hose & fitting.

### Part Number:

- 513WD - 2" T&E 180° with direct drive hydraulic motor mount.

### Horsepower Requirements:


- Hydraulic Motor 20hp, with SAE "A" mount.
  - 104 Series Recommended.

### Recommended Operating Procedures:

- Maximum Temp: 212°F (regular seals).
- Maximum RPM: 750RPM at the pump.

*\*Note: Hydraulic Motor/ System to be ran within the manufacturers recommended specifications. Some Hydraulic motors may not allow for the maximum pump capabilities.*

- Maximum Pressure: 125 PSI.
  - Note: Pump pressure is maximum safe operating pressure, not the maximum pressure the pump will produce.

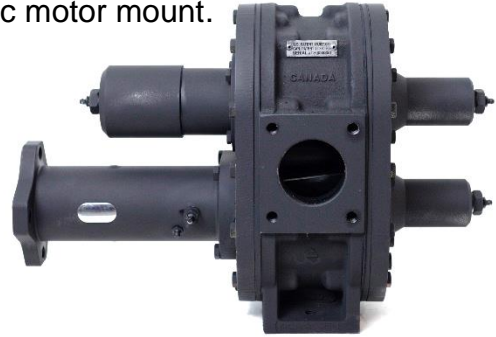

### Installation Dimensions:

